


# EXPLORER CASES

By GT LINE



HARD CASES  
100% MADE IN ITALY



From the European Leader in  
Technical Cases Manufacturing

[www.explorercases.com](http://www.explorercases.com)





100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION



WATERTIGHT

INTERSTACKABLE

HIGH THICKNESS  
BODY MATERIAL

CORROSIONPROOF

TEMP RATING  
-33°C/+90°C

SAND & DUST  
PROOF

SHOCKPROOF

CRUSHPROOF

DESIGNED FOR  
MILITARY USE

AIRTIGHT

STAINLESS TREATED  
METAL PARTS

PADLOCKABLE

GUARANTEED  
FOREVER

**NEW**

INTRODUCING:



The lightest cases in their size category

# BUILT STRONGER TO LAST LONGER



Explorer Cases are the first of their kind to be manufactured in Europe, indeed their clean lines and good looks reflect their Italian heritage. We have produced a range of virtually indestructible durable waterproof cases providing a solution for any equipment requiring a high level of protection. Applications range from Military and Aerospace to Computer and Equipment cases while their dust and waterproof qualities offer absolute protection making them ideal for use in the harshest environment.

The Explorer Cases have been subjected to a series of controlled laboratory tests to prove their suitability for use in the most extreme and hazardous applications and ensure that they meet the exacting standards of: IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models) - Nato Stock Numbers (NSN) available on demand.



## FEATURES:

1. REINFORCED CORNERS
2. PU SINGLE BLOCK O-RING SEAL
3. LID CAN BE SET TO SLIDE-OFF (certain mod.)
4. CORROSION PROOF METAL PINS
5. PP BASED INJECTION MOLDED BODY
6. SELF OILING WHEELS (certain mod.)
7. ERGONOMICALLY DESIGNED HANDLE
8. PRESSURE RELEASE VALVE
9. CUSTOMIZABLE NAME TAG
10. PRECUBED FOAM LAYERS
11. CONVOLUTED FOAM IN THE LID
12. PADLOCKABLE IN SEVERAL POINTS
13. JAM-FREE LATCHES
14. POSITIVE STACKING LOCATION

## STANDARD COLORS:



BLACK




MIL. GREEN



ORANGE



DES. SAND



\*BY RELEASING THE SCREW LID BECOMES SET TO SLIDE OFF WHEN OPENED AT 70°





# OUR SUPERIOR FEATURES

100% A  
GU

- Made of Copolymer Polypropylene compound
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories to customize your experience
- Incorporate a number of patented innovations
- All available empty or with "pick & pluck" foam layers





| 1908           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 190           | 125                   | 85          | 20           | 65               |
|                | in   | 7 1/2         | 4 15/16               | 3 3/8       | 13/16        | 2 9/16           |
| External dim.  | mm   | 216           | 180                   | 102         |              |                  |
|                | in   | 8 1/2         | 7 1/16                | 4           |              |                  |
| Weight empty   | kg 0,70  |               | lbs 1.54              |             |              |                  |
| Weight w/foam  | kg 0,80  |               | lbs 1.76              |             |              |                  |
| Volume         | lt 2,0   |               | gal 0.52              |             |              |                  |
| Buoyancy       | kg/max 1,4   |               | lbs/max 3.08          |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Art. SHOULDERKIT.U



| 1913           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 190           | 125                   | 135         | 20           | 115              |
|                | in   | 7 1/2         | 4 15/16               | 5 5/16      | 13/16        | 4 1/2            |
| External dim.  | mm   | 216           | 180                   | 152         |              |                  |
|                | in   | 8 1/2         | 7 1/16                | 6           |              |                  |
| Weight empty   | kg 0,85  |               | lbs 1.87              |             |              |                  |
| Weight w/foam  | kg 0,92  |               | lbs 2.02              |             |              |                  |
| Volume         | lt 3,2   |               | gal 0.79              |             |              |                  |
| Buoyancy       | kg/max 2,4   |               | lbs/max 5.29          |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Optional shoulder strap available (Art. SHOULDERKIT.U)

**ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**





| <b>2209</b>    |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 220           | 160                   | 95          | 20           | 75               |
|                | in   | 8 11/16       | 6 5/16                | 3 3/4       | 13/16        | 2 15/16          |
| External dim.  | mm   | 246           | 215                   | 112         |              |                  |
|                | in   | 9 11/16       | 8 7/16                | 4 7/16      |              |                  |
| Weight empty   | kg 0,88  |               | lbs 1.94              |             |              |                  |
| Weight w/foam  | kg 0,99  |               | lbs 2.18              |             |              |                  |
| Volume         | lt 3,3   |               | gal 0.79              |             |              |                  |
| Buoyancy       | kg/max 2,3   |               | lbs/max 5.07          |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Art. SHOULDERKIT.U



| <b>2214</b>    |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 220           | 160                   | 145         | 20           | 125              |
|                | in   | 8 11/16       | 6 5/16                | 5 11/16     | 13/16        | 4 15/16          |
| External dim.  | mm   | 246           | 215                   | 162         |              |                  |
|                | in   | 9 11/16       | 8 7/16                | 6 3/8       |              |                  |
| Weight empty   | kg 1,16  |               | lbs 2.56              |             |              |                  |
| Weight w/foam  | kg 1,29  |               | lbs 2.84              |             |              |                  |
| Volume         | lt 5,1   |               | gal 1.32              |             |              |                  |
| Buoyancy       | kg/max 3,9   |               | lbs/max 8.59          |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Optional shoulder strap available (Art. SHOULDERKIT.U)



# OUR FULL WARRANTY

"We want you to count on Explorer Cases as the most reliable resource to carry your valuable equipment in the harshest environments. That's why you can count FOREVER on our cases warranty against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.

After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are now so popular in extreme environments, no matter what human being, animal or fish you come across in your life journey."

\* Warranty valid only if the case has not been subject to abuse, misuse, negligence or accident.

See full details on [www.explorercases.com](http://www.explorercases.com)



| 2712           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 276           | 200                   | 120         | 35           | 85               |
|                | in   | 10 7/8        | 7 7/8                 | 4 3/4       | 1 3/8        | 3 3/8            |
| External dim.  | mm   | 305           | 270                   | 144         |              |                  |
|                | in   | 12            | 10 5/8                | 5 11/16     |              |                  |
| Weight empty   | kg 1,62  |               | lbs 3.57              |             |              |                  |
| Weight w/foam  | kg 1,83  |               | lbs 4.03              |             |              |                  |
| Volume         | lt 6,6   |               | gal 1.58              |             |              |                  |
| Buoyancy       | kg/max 4,2   |               | lbs/max 9.25          |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-R and PANEXPL27
- Counterbalance supports

| 2712      | BAG-R | DIV2712 |
|-----------|-------|---------|
| PANEXPL27 |       |         |



| 2717           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 276           | 200                   | 170         | 35           | 135              |
|                | in   | 10 7/8        | 7 7/8                 | 6 11/16     | 1 3/8        | 5 5/16           |
| External dim.  | mm   | 305           | 270                   | 194         |              |                  |
|                | in   | 12            | 10 5/8                | 7 5/8       |              |                  |
| Weight empty   | kg 1,93  |               | lbs 4.25              |             |              |                  |
| Weight w/foam  | kg 2,12  |               | lbs 4.67              |             |              |                  |
| Volume         | lt 9,3   |               | gal 2.37              |             |              |                  |
| Buoyancy       | kg/max 6,7   |               | lbs/max 14.77         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-S and PANEXPL27
- Counterbalance supports

| 2717      | BAG-S | DIV2717 |
|-----------|-------|---------|
| PANEXPL27 |       |         |



| <b>3005</b>    |  | L                  | W                 | D                     |       |       |
|----------------|--|--------------------|-------------------|-----------------------|-------|-------|
|                |  | LENGTH             | WIDTH             | DEPTH                 | LID   | BASE  |
| Internal dim.  | mm   | 300                | 210               | 58                    | 20    | 38    |
|                | in   | 11 13/16           | 8 1/4             | 2 5/16                | 13/16 | 1 1/2 |
| External dim.  | mm   | 326                | 269               | 75                    |       |       |
|                | in   | 12 13/16           | 10 9/16           | 2 15/16               |       |       |
| Weight empty   |  | kg 1,10            |                   | lbs 2.42              |       |       |
| Weight w/foam  |  | kg 1,20            |                   | lbs 2.64              |       |       |
| Volume         |  | lt 4               |                   | gal 1.05              |       |       |
| Buoyancy       |  | kg/max 2,10        |                   | lbs/max 4.62          |       |       |
| Temp. rating   |  | °C min -33 max +90 |                   | °F min -27.4 max +194 |       |       |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                    |                   |                       |       |       |
| Versions       | <b>B</b>   | <b>O</b>           | <b>G</b>          | <b>D</b>              |       |       |
|                | black w/foam   | orange w/foam      | mil. green w/foam | des. sand w/foam      |       |       |
|                | <b>BE</b>  | <b>OE</b>          | <b>GE</b>         | <b>DE</b>             |       |       |
|                | black empty  | orange empty       | mil. green empty  | des. sand empty       |       |       |

- Stainless steel reinforced padlockable points
- Can be stored in vertical position
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Reccessable handle keeps the case in flat horizontal position



Can be stored in vertical position



Art. SHOULDERKIT.U



Reccessable low profile handle



Stainless steel reinforced padlockable points




| <b>3317</b>    |  | L                  | W                 | D                     |              |                  |
|----------------|--|--------------------|-------------------|-----------------------|--------------|------------------|
|                |  | LENGTH             | WIDTH             | DEPTH                 | LID          | BASE             |
| Internal dim.  | mm   | 330                | 234               | 170                   | 68           | 102              |
|                | in   | 13                 | 9 3/16            | 6 11/16               | 2 11/16      | 4                |
| External dim.  | mm   | 360                | 304               | 194                   |              |                  |
|                | in   | 14 3/16            | 11 15/16          | 7 5/8                 |              |                  |
| Weight empty   |  | kg 2,29            |                   | lbs 5.04              |              |                  |
| Weight w/foam  |  | kg 2,51            |                   | lbs 5.53              |              |                  |
| Volume         |  | lt 13,1            |                   | gal 3.43              |              |                  |
| Buoyancy       |  | kg/max 7,0         |                   | lbs/max 15.43         |              |                  |
| Temp. rating   |  | °C min -33 max +90 |                   | °F min -27.4 max +194 |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                    |                   |                       |              |                  |
| Versions       | <b>B</b>   | <b>O</b>           | <b>G</b>          | <b>BE</b>             | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam      | mil. green w/foam | black empty           | orange empty | mil. green empty |
|                |  |                    |                   |                       |              |                  |

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-T and PANEXPL33



Counterbalance supports

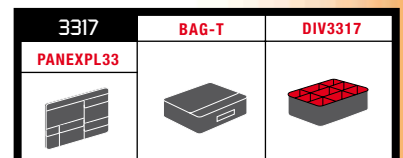






| <b>3317W</b>   |  | L           | W                     | D       |         |      |
|----------------|--|-------------|-----------------------|---------|---------|------|
|                |  | LENGTH      | WIDTH                 | DEPTH   | LID     | BASE |
| Internal dim.  | mm   | 330         | 350                   | 170     | 68      | 102  |
|                | in   | 13          | 13 3/4                | 6 11/16 | 2 11/16 | 4    |
| External dim.  | mm   | 360         | 420                   | 194     |         |      |
|                | in   | 14 3/16     | 16 9/16               | 7 5/8   |         |      |
| Weight empty   | kg 2,92  |             | lbs 6.43              |         |         |      |
| Weight w/foam  | kg 3,30  |             | lbs 7.27              |         |         |      |
| Volume         | lt 19,6  |             | gal 5.17              |         |         |      |
| Buoyancy       | kg/max 10,6  |             | lbs/max 23.36         |         |         |      |
| Temp. rating   | °C min -33 max +90                                   |             | °F min -27.4 max +194 |         |         |      |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |             |                       |         |         |      |
| Versions       | <b>B</b>   | <b>BE</b>   |                       |         |         |      |
|                | black w/foam   | black empty |                       |         |         |      |

- Lid can be set to slide-off (see pg. 3 for details)
- Can accommodate BAG-U and PANEXPL33W



Counterbalance supports

| 3317W   | BAG-U   | DIV3317W  |
|---|---|---|
| PANEXPL33W  |   |   |
|  |  |  |






| <b>3818</b>    |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 380           | 270                   | 180         | 45           | 135              |
|                | in   | 14 15/16      | 10 5/8                | 7 1/16      | 1 3/4        | 5 5/16           |
| External dim.  | mm   | 410           | 340                   | 205         |              |                  |
|                | in   | 16 1/8        | 13 3/8                | 8 1/16      |              |                  |
| Weight empty   | kg 3,14  |               | lbs 6.92              |             |              |                  |
| Weight w/foam  | kg 3,58  |               | lbs 7.89              |             |              |                  |
| Volume         | lt 18,4  |               | gal 4.75              |             |              |                  |
| Buoyancy       | kg/max 12,4  |               | lbs/max 27.33         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Soft grip rubber handle
- Can accommodate BAG-E and PANEXPL38



Counterbalance supports

| 3818  | BAG-E   | DIV3818   |
|---|---|---|
| PANEXPL38   |   |   |
|  |  |  |



**ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**



| 4412           |  | L                   | W                 | D                     |              |                  |
|----------------|--|---------------------|-------------------|-----------------------|--------------|------------------|
|                |  | LENGTH              | WIDTH             | DEPTH                 | LID          | BASE             |
| Internal dim.  | mm   | 445                 | 345               | 125                   | 47           | 78               |
|                | in   | 17 1/2              | 13 9/16           | 4 15/16               | 1 7/8        | 3 1/16           |
| External dim.  | mm   | 474                 | 415               | 149                   |              |                  |
|                | in   | 18 11/16            | 16 5/16           | 5 7/8                 |              |                  |
| Weight empty   |  | kg 3,40             |                   | lbs 7.49              |              |                  |
| Weight w/foam  |  | kg 3,90             |                   | lbs 8.59              |              |                  |
| Volume         |  | lt 19,2             |                   | gal 5.01              |              |                  |
| Buoyancy       |  | kg/max 10,7         |                   | lbs/max 23.58         |              |                  |
| Temp. rating   |  | °C min -33 max +90  |                   | °F min -27.4 max +194 |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                     |                   |                       |              |                  |
| Versions       | <b>B</b>   | <b>O</b>            | <b>G</b>          | <b>BE</b>             | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam       | mil. green w/foam | black empty           | orange empty | mil. green empty |
|                | <b>BC</b>  | <b>GC</b>           |                   |                       |              |                  |
|                | black w/pc bag                                       | mil. green w/pc bag |                   |                       |              |                  |

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Soft grip rubber handle
- Counterbalance supports
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44
- Can accommodate one GBAG 44



**4412.B C and 4412.G C >>>**  
include:  
 - computer bag with shoulder strap (art. BAG-PC44)  
 - organized lid panel (art. PANEXPL44)  
 - shoulder strap attachment metal pins kit to fix the shoulder strap also on the case (SHOULDER KIT.U)

| 4412      | BAG-PC44 | DIV4412 |
|-----------|----------|---------|
| PANEXPL44 |          |         |
|           |          |         |



| <b>4419</b>    |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 445           | 345                   | 190         | 47           | 143              |
|                | in   | 17 1/2        | 13 9/16               | 7 1/2       | 1 7/8        | 5 5/8            |
| External dim.  | mm   | 474           | 415                   | 214         |              |                  |
|                | in   | 18 11/16      | 16 5/16               | 8 7/16      |              |                  |
| Weight empty   | kg 4,00  |               | lbs 8.81              |             |              |                  |
| Weight w/foam  | kg 4,70  |               | lbs 10.36             |             |              |                  |
| Volume         | lt 29,2  |               | gal 7.66              |             |              |                  |
| Buoyancy       | kg/max 19,7  |               | lbs/max 43.43         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-A, DIV4419 and PANEXPL44



Art. SHOULDERKIT.U

| <b>4419</b>      | <b>BAG-A</b> | <b>DIV4419</b> |
|------------------|--------------|----------------|
| <b>PANEXPL44</b> |              |                |
|                  |              |                |



| <b>4820</b>    |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 480           | 370                   | 205         | 50           | 155              |
|                | in   | 18 7/8        | 14 9/16               | 8 1/16      | 1 15/16      | 6 1/8            |
| External dim.  | mm   | 520           | 435                   | 230         |              |                  |
|                | in   | 20 1/2        | 17 1/8                | 9 1/16      |              |                  |
| Weight empty   | kg 4,64  |               | lbs 10.22             |             |              |                  |
| Weight w/foam  | kg 5,40  |               | lbs 11.90             |             |              |                  |
| Volume         | lt 35,5  |               | gal 9.24              |             |              |                  |
| Buoyancy       | kg/max 24,7  |               | lbs/max 54.45         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
|                | MIL-STD 810G   |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48



| <b>4820</b>      | <b>BAG-F</b>   |
|------------------|----------------|
| <b>PANEXPL48</b> |                |
|                  |                |
| <b>BAG-PC48</b>  | <b>DIV4820</b> |
|                  |                |

Art. BAG-PC48 - Splittable, padded PC and divider bag. It is the ideal solution for carrying and protecting both computer (17" size) and photographic equipment. Adjustable shoulder belt included. This optional bag perfectly fits into the 4820 model case.



| 5117           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 517           | 277                   | 173         | 50           | 123              |
|                | in   | 20 3/8        | 10 7/8                | 6 13/16     | 1 15/16      | 4 13/16          |
| External dim.  | mm   | 546           | 347                   | 197         |              |                  |
|                | in   | 21 1/2        | 13 11/16              | 7 3/4       |              |                  |
| Weight empty   | kg 3,80  |               | lbs 8.37              |             |              |                  |
| Weight w/foam  | kg 4,50  |               | lbs 9.92              |             |              |                  |
| Volume         | lt 24,7  |               | gal 6.34              |             |              |                  |
| Buoyancy       | kg/max 15,8  |               | lbs/max 34.83         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Lid can be set to slide-off (see pg. 3 for details)
- Optional shoulder strap available
- Soft grip rubber handle
- Can accommodate BAG-B, DIV51 and PANEXPL51



| 5117-5122 | BAG-B | DIV51 |
|-----------|-------|-------|
| PANEXPL51 |       |       |

Art. SHOULDERKIT.U



| 5122           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 517           | 277                   | 217         | 50           | 167              |
|                | in   | 20 3/8        | 10 7/8                | 8 9/16      | 1 15/16      | 6 9/16           |
| External dim.  | mm   | 546           | 347                   | 247         |              |                  |
|                | in   | 21 1/2        | 13 11/16              | 9 3/4       |              |                  |
| Weight empty   | kg 6,00  |               | lbs 13.22             |             |              |                  |
| Weight w/foam  | kg 7,00  |               | lbs 15.43             |             |              |                  |
| Volume         | lt 31,0  |               | gal 8.18              |             |              |                  |
| Buoyancy       | kg/max 21,5  |               | lbs/max 47.39         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Lid can be set to slide-off (see pg. 3 for details)
- Soft grip rubber handle and telescopic handle
- Wheels with bearings
- Can accommodate BAG-B, DIV51 and PANEXPL51

| 5117-5122 | BAG-B | DIV51 |
|-----------|-------|-------|
| PANEXPL51 |       |       |



Easy to open release telescopic handle



\* Complies with Ryanair, Vueling and other low-cost airlines' size restrictions.

|                |  | 5218         |                   | L                | W           | D                |                 |  |
|----------------|--|--------------|-------------------|------------------|-------------|------------------|-----------------|--|
|                |  | LENGTH       | WIDTH             | DEPTH            | LID         | BASE             |                 |  |
| Internal dim.  | mm   | 520          | 285               | 180              | 30          | 150              |                 |  |
|                | in   | 20 1/2       | 11 1/4            | 7 1/16           | 1 3/16      | 5 7/8            |                 |  |
| External dim.  | mm   | 550          | 350               | 200              |             |                  |                 |  |
|                | in   | 21 5/8       | 13 3/4            | 7 7/8            |             |                  |                 |  |
| Weight empty   | kg   | 3,75         |                   | lbs              |             | 8.26             |                 |  |
| Weight w/foam  | kg   | 4,30         |                   | lbs              |             | 9.47             |                 |  |
| Volume         | lit  | 26,6         |                   | gal              |             | 7.02             |                 |  |
| Buoyancy       | kg/max   | 20,0         |                   | lbs/max          |             | 44.09            |                 |  |
| Temp. rating   | °C   | min -33      | max +90           | °F               |             | min -27.4        | max +194        |  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |              |                   |                  |             |                  |                 |  |
| Mod.           |  | <b>B</b>     | <b>G</b>          | <b>D</b>         | <b>BE</b>   | <b>GE</b>        | <b>DE</b>       |  |
|                |  | black w/foam | mil. green w/foam | des. sand w/foam | black empty | mil. green empty | des. sand empty |  |

Optional shipping label holder (Art. KIN.1224)




New pull release latch grants additional safety, drop test proof

- Lid can be set to slide-off (see pg. 3 for details)
- New soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



Self-oiling free running wheels



## BACKPACK CABIN

(see pg. 33 for details)



**100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**



Optional shipping label holder (Art. KIN.1224)



New pull release latch grants additional safety, drop test proof



\* Complies with major airlines' size restrictions.

| 5221           |              | L  | W                | D                     |                  |                 |
|----------------|--------------|--|------------------|-----------------------|------------------|-----------------|
|                |              | LENGTH   | WIDTH            | DEPTH                 | LID              | BASE            |
| Internal dim.  | mm           | 520  | 285              | 205                   | 55               | 150             |
|                | in           | 20 1/2   | 11 1/4           | 8 1/16                | 2 3/16           | 5 7/8           |
| External dim.  | mm           | 550  | 350              | 225                   |                  |                 |
|                | in           | 21 5/8   | 13 3/4           | 8 7/8                 |                  |                 |
| Weight empty   |              | kg 3,90  |                  | lbs 8.59              |                  |                 |
| Weight w/foam  |              | kg 4,50  |                  | lbs 9.92              |                  |                 |
| Volume         |              | lt 30,3  |                  | gal 8.00              |                  |                 |
| Buoyancy       |              | kg/max 20,0  |                  | lbs/max 44.09         |                  |                 |
| Temp. rating   |              | °C min -33 max +90                                   |                  | °F min -27.4 max +194 |                  |                 |
| Certifications |              | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                  |                       |                  |                 |
| Mod.           | <b>B</b>     | <b>G</b>   | <b>D</b>         | <b>BE</b>             | <b>GE</b>        | <b>DE</b>       |
|                | black w/foam | mil. green w/foam                                    | des. sand w/foam | black empty           | mil. green empty | des. sand empty |

- Lid can be set to slide-off (see pg. 3 for details)
- New soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate DIV52 and PANEXPL52



|           |       |
|-----------|-------|
| 5218-5221 | DIV52 |
| PANEXPL52 |       |
|           |       |

Self-oiling free running wheels

# GREAT VERSATILITY OF CONFIGURATIONS



Telescopic handle



Removable top lid




Ability to stack



Automatic pressure release valve



4 front door latches




Folding side handles for two men lift



4 top lid latches



Padlockable points



4 robust self-oiling wheels




Easy transportability



All drawers come out completely



Removable frontal lid



Front lid can be opened up to 180°

**5140.BKT01.AH**  
Case with foam filled drawers



- O-rings on upper and frontal lids
- Detachable top lid
- Removable tray
- I.D. label
- 1x30H mm. drawer with bi-color pre-cubed foam
- 2x60H mm. drawers with bi-color pre-cubed foam
- 1x95H mm. drawer with bi-color pre-cubed foam
- Detachable frontal lid
- Label for content identification of the drawers

Improved stop-in-open position drawers system



**5140.BKT02.AH**  
Case with empty drawers



- O-rings on upper and frontal lids
- Detachable top lid
- Removable tray
- I.D. label
- 1x30H mm. drawer empty
- 2x60H mm. drawers empty
- 1x95H mm. drawer empty
- Detachable frontal lid
- Label for content identification of the drawers

Improved stop-in-open position drawers system





## USE IT WITH IDRAW - DRAWERS

**5140.BKTE.AH**

Case drawers ready

Side rails, can fit a maximum of 8 IDRAW (see the combination table below)



AIDRAW3.E



AIDRAW3.F



AIDRAW6.E



AIDRAW6.F




AIDRAW9.E



AIDRAW9.F


### IDRAW - 10 POSSIBLE CONFIGURATIONS - more info on [www.explorercases.com](http://www.explorercases.com)




8 x H30 mm



6 x H30 + 1 x H60 mm



4 x H30 + 2 x H60 mm




2 x H30 + 3 x H60 mm



4 x H60 mm



5 x H30 + 1 x H95 mm




2 x H30 + 2 x H95 mm



1 x H60 + 2 x H95 mm



1x H30+2x H60+1x H95mm



3x H30+1x H60+1x H95mm

#### Art. AIDRAW

Shock-proof PP drawers available in 3 different heights, 30, 60 and 95 mm, designed to contain all kinds of components and accessories. They can be easily inserted into the 5140. Available completely empty (.E) or with a bicolor pre-cubed foam (.F). See table on the next page.



# USE IT WITH IBOX - BOXES

## 5140X.B Case boxes ready

NEW Side rails, can fit a maximum of 7 IBOX (see the combination table below)



Art. AIBOX  
Available in 3 different heights and 2 internal configurations. See table below.



Art. AIPANEL PLEXI  
Transparent lid cover. Useful for foam inserts or readable instructions.




## AIWHEELS

4 optional pivoting wheels, 2 equipped with brakes, allow 5140 through narrow spaces.

| AIDRAW and AIBOX |           |              |                |      |
|------------------|-----------|--------------|----------------|------|
| DESCR.           | ART.      | INT. CONFIG. | INT. DIM. (mm) | Q.TY |
| DRAWER           | AIDRAW3.E | EMPTY        | 467x255xH30    | 1 pc |
| DRAWER           | AIDRAW3.F | WITH FOAM    | 467x255xH30    | 1 pc |
| DRAWER           | AIDRAW6.E | EMPTY        | 467x255xH60    | 1 pc |
| DRAWER           | AIDRAW6.F | WITH FOAM    | 467x255xH60    | 1 pc |
| DRAWER           | AIDRAW9.E | EMPTY        | 467x255xH95    | 1 pc |
| DRAWER           | AIDRAW9.F | WITH FOAM    | 467x255xH95    | 1 pc |
| BOX              | AIBOX3.E  | EMPTY        | 467x255xH30    | 1 pc |
| BOX              | AIBOX3.F  | WITH FOAM    | 467x255xH30    | 1 pc |
| BOX              | AIBOX6.E  | EMPTY        | 467x255xH60    | 1 pc |
| BOX              | AIBOX6.F  | WITH FOAM    | 467x255xH60    | 1 pc |
| BOX              | AIBOX9.E  | EMPTY        | 467x255xH95    | 1 pc |
| BOX              | AIBOX9.F  | WITH FOAM    | 467x255xH95    | 1 pc |

| 5140           |  | L                             | W                     | D        |           |      |
|----------------|--|-------------------------------|-----------------------|----------|-----------|------|
|                |  | LENGTH                        | WIDTH                 | DEPTH    | LID       | BASE |
| External dim.  | mm   | 581                           | 381                   | 455      |           |      |
|                | in   | 22 7/8                        | 15                    | 17 15/16 |           |      |
| VERSIONS       | BKT01.AH   | black - w/foam filled drawers | Weight                | kg 13,80 | lbs 30.42 |      |
|                | BKT02.AH   | black - w/empty drawers       | Weight                | kg 13,00 | lbs 28.66 |      |
|                | BKTE.AH  | black - AIDRAW ready          | Weight                | kg 9,75  | lbs 21.49 |      |
|                | X.B  | black - AIBOX ready           | Weight                | kg 9,75  | lbs 21.49 |      |
|                | BE.AH  | black - completely empty      | Weight                | kg 7,52  | lbs 16.57 |      |
| Temp. rating   | °C min -33 max +90                                   |                               | °F min -27.4 max +194 |          |           |      |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                               |                       |          |           |      |

## IBOX - 8 POSSIBLE CONFIGURATIONS - more info on [www.explorercases.com](http://www.explorercases.com)

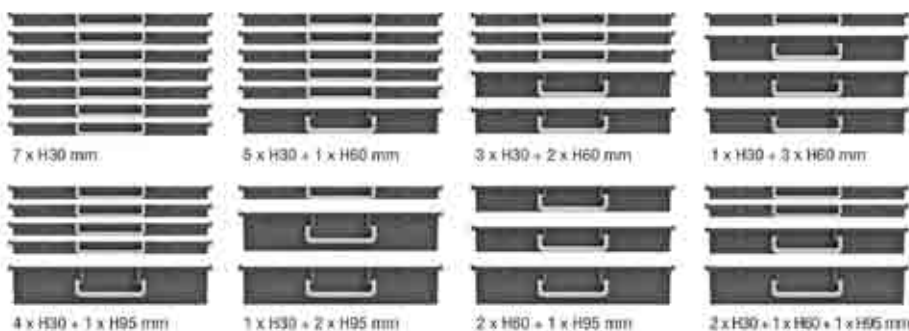

### Art. AIBOX

The Aidraw with a translucent lid becomes a practical organizer.

The ultimate modular solution for the storage, transport and use of sets of spare parts, components and tools.

Available completely empty (.E) or with a bicolor pre-cubed foam (.F).

They can be stacked positively and can stand in vertical position.



# CERTIFICATIONS

There are lots of different kinds of waterproof cases available on the market, but only Explorer Cases can guarantee superior features of excellence. As a matter of fact, they feature the highest number of patented innovations.

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)
- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand

Certificates available for download on [www.explorercases.com](http://www.explorercases.com)



| 5325           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 538           | 405                   | 250         | 60           | 190              |
|                | in   | 21 3/16       | 15 15/16              | 9 13/16     | 2 3/8        | 7 1/2            |
| External dim.  | mm   | 607           | 475                   | 275         |              |                  |
|                | in   | 23 7/8        | 18 11/16              | 10 13/16    |              |                  |
| Weight empty   | kg 7   |               | lbs 15.43             |             |              |                  |
| Weight w/foam  | kg 8,25  |               | lbs 18.18             |             |              |                  |
| Volume         | lt 53  |               | gal 14.00             |             |              |                  |
| Buoyancy       | kg/max 37,2  |               | lbs/max 82.01         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Side handles
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53



Two men lift side handles



Stainless steel reinforced padlockable points

| 5325-5326 | 2x BAG-V            |
|-----------|---------------------|
| PANEXPL53 |                     |
| 2x DIV53  | 1x BAG-V + 1x DIV53 |
|           |                     |

**100% ABSOLUTE  
GUARANTEED  
FOREVER  
PROTECTION**



| <b>5326</b>    |  | L               | W                 | D                     |              |                  |
|----------------|--|-----------------|-------------------|-----------------------|--------------|------------------|
|                |  | LENGTH          | WIDTH             | DEPTH                 | LID          | BASE             |
| Internal dim.  | mm   | 538             | 405               | 250                   | 60           | 190              |
|                | in   | 21 3/16         | 15 15/16          | 9 13/16               | 2 3/8        | 7 1/2            |
| External dim.  | mm   | 627             | 475               | 292                   |              |                  |
|                | in   | 24 11/16        | 18 11/16          | 11 1/2                |              |                  |
| Weight empty   | kg   | 10              |                   | lbs 22.04             |              |                  |
| Weight w/foam  | kg   | 11,25           |                   | lbs 24.80             |              |                  |
| Volume         | lt   | 53              |                   | gal 14.00             |              |                  |
| Buoyancy       | kg/max   | 37,2            |                   | lbs/max 82.01         |              |                  |
| Temp. rating   | °C   | min -33 max +90 |                   | °F min -27.4 max +194 |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                 |                   |                       |              |                  |
| Versions       | <b>B</b>   | <b>O</b>        | <b>G</b>          | <b>BE</b>             | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam   | mil. green w/foam | black empty           | orange empty | mil. green empty |

- Lid can be set to slide-off (see pg. 3 for details)
- Stainless steel reinforced padlockable points
- Two men lift side handles
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53




Stainless steel reinforced padlockable points

| 5325-5326        | 2x BAG-V                   |
|------------------|----------------------------|
| <b>PANEXPL53</b> |                            |
|                  | <b>1x BAG-V + 1x DIV53</b> |
|                  |                            |



| 5822           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 580           | 440                   | 220         | 60           | 160              |
|                | in   | 22 13/16      | 17 5/16               | 8 11/16     | 2 3/8        | 6 5/16           |
| External dim.  | mm   | 650           | 510                   | 245         |              |                  |
|                | in   | 25 9/16       | 20 1/16               | 9 5/8       |              |                  |
| Weight empty   | kg 7,16  |               | lbs 15.78             |             |              |                  |
| Weight w/foam  | kg 8,39  |               | lbs 18.49             |             |              |                  |
| Volume         | lt 56,1  |               | gal 14.79             |             |              |                  |
| Buoyancy       | kg/max 36,7  |               | lbs/max 80.90         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
|                | MIL-STD 810F   |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Side handles
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58




| 5823           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 580           | 440                   | 220         | 60           | 160              |
|                | in   | 22 13/16      | 17 5/16               | 8 11/16     | 2 3/8        | 6 5/16           |
| External dim.  | mm   | 670           | 510                   | 262         |              |                  |
|                | in   | 26 3/8        | 20 1/16               | 10 5/16     |              |                  |
| Weight empty   | kg 9,17  |               | lbs 20.21             |             |              |                  |
| Weight w/foam  | kg 10,40   |               | lbs 22.92             |             |              |                  |
| Volume         | lt 56,1  |               | gal 14.79             |             |              |                  |
| Buoyancy       | kg/max 36,7  |               | lbs/max 80.90         |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Side handles
- Stainless steel reinforced padlockable points
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58



Self-oiling free running wheels



100% ABSOLUTE  
 GUARANTEED  
 FOREVER  
 PROVIDED



| 5833           |  | L             | W                     | D           |              |                  |
|----------------|--|---------------|-----------------------|-------------|--------------|------------------|
|                |  | LENGTH        | WIDTH                 | DEPTH       | LID          | BASE             |
| Internal dim.  | mm   | 580           | 440                   | 330         | 60           | 270              |
|                | in   | 22 13/16      | 17 5/16               | 13          | 2 3/8        | 10 5/8           |
| External dim.  | mm   | 670           | 510                   | 372         |              |                  |
|                | in   | 26 3/8        | 20 1/16               | 14 5/8      |              |                  |
| Weight empty   | kg 10,54   |               | lbs 23.23             |             |              |                  |
| Weight w/foam  | kg 12,65   |               | lbs 27.88             |             |              |                  |
| Volume         | lt 84,2  |               | gal 22.19             |             |              |                  |
| Buoyancy       | kg/max 62,0  |               | lbs/max 136.68        |             |              |                  |
| Temp. rating   | °C min -33 max +90                                   |               | °F min -27.4 max +194 |             |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |               |                       |             |              |                  |
|                | MIL-STD 810F   |               |                       |             |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>              | <b>BE</b>   | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam     | black empty | orange empty | mil. green empty |

- Side handles
- Stainless steel reinforced padlockable points
- Wheels and telescopic handle
- Soft grip rubber handle
- Can accommodate 1xDIV58.1+1xDIV58+1xDIV58.2, 2xDIV58+2xDIV58.2, 2xDIV58.1, 1xBAG-G+1xDIV58.2+1xDIV58.1, 2xBAG-G+2xDIV58.2 and PANEXPL58
- Can accommodate up to 5 GBAG 58

| 5833                               |  | 1x DIV58.1 + 1x DIV58 + 1x DIV58.2 |  |
|------------------------------------|--|------------------------------------|--|
| PANEXPL58                          |  |                                    |  |
| 2x DIV58 + 2x DIV58.2              |  | 2x DIV58.1                         |  |
| 1x BAG-G + 1x DIV58.2 + 1x DIV58.1 |  | 2x BAG-G + 2x DIV58.2              |  |



Two men lift side handles

| <b>7630</b>    |  | L               | W                 | D           |                    |                  |
|----------------|--|-----------------|-------------------|-------------|--------------------|------------------|
|                |  | LENGTH          | WIDTH             | DEPTH       | LID                | BASE             |
| Internal dim.  | mm   | 765             | 485               | 305         | 60                 | 245              |
|                | in   | 30 1/8          | 19 1/8            | 12          | 2 3/8              | 9 5/8            |
| External dim.  | mm   | 860             | 560               | 355         |                    |                  |
|                | in   | 33 7/8          | 22 1/16           | 14          |                    |                  |
| Weight empty   | kg   | 13,56           |                   | lbs         | 29.89              |                  |
| Weight w/foam  | kg   | 16,39           |                   | lbs         | 36.13              |                  |
| Volume         | lt   | 113,1           |                   | gal         | 29.85              |                  |
| Buoyancy       | kg/max   | 81,8            |                   | lbs/max     | 180.33             |                  |
| Temp. rating   | °C   | min -33 max +90 |                   | °F          | min -27.4 max +194 |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                 |                   |             |                    |                  |
|                | MIL-STD 810F - ATA 300                               |                 |                   |             |                    |                  |
| Versions       | <b>B</b>   | <b>O</b>        | <b>G</b>          | <b>BE</b>   | <b>OE</b>          | <b>GE</b>        |
|                | black w/foam   | orange w/foam   | mil. green w/foam | black empty | orange empty       | mil. green empty |

- Side handles and large front handle
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Self-oiling free running wheels
- Can accommodate 4xBAG-L, 2xBAG-M, 2xBAG-L+1xBAG-M, 2xDIV7630 o 2xBAG-L+1xDIV7630 e PANEXPL76
- Can accommodate up to 6 GBAG 76

| 7630                  | 4x BAG-L            |
|-----------------------|---------------------|
| PANEXPL76             |                     |
|                       |                     |
| 2x DIV7630            | 2x BAG-M            |
|                       |                     |
| 2x BAG-L + 1x DIV7630 | 2x BAG-L + 1x BAG-M |
|                       |                     |

# THE RANGE



The Explorer Cases are available in several different sizes with four standard colours and two main standard configurations. Special colours are available on request depending on quantity.

It is possible to personalize the interiors into various configurations; the clean internal lines provide the ideal case for foam converters and custom foam fitting and the pre cubed foam allows the user to tailor the insert to their own individual requirement.

In addition the cases are moulded with location points offering the easy insertion of special supports for panel mounting, panel rings, to easily create your customized solution.



| 7641           |  | L             | W                 | D                     |              |                  |
|----------------|--|---------------|-------------------|-----------------------|--------------|------------------|
|                |  | LENGTH        | WIDTH             | DEPTH                 | LID          | BASE             |
| Internal dim.  | mm   | 765           | 485               | 415                   | 60           | 355              |
|                | in   | 30 1/8        | 19 1/8            | 16 5/16               | 2 3/8        | 14               |
| External dim.  | mm   | 860           | 560               | 460                   |              |                  |
|                | in   | 33 7/8        | 22 1/16           | 18 1/8                |              |                  |
| Weight empty   | kg 15,02   |               | lbs 33.11         |                       |              |                  |
| Weight w/foam  | kg 18,87   |               | lbs 41.60         |                       |              |                  |
| Volume         | lt 153,9   |               | gal 40.41         |                       |              |                  |
| Buoyancy       | kg/max 118,5   |               | lbs/max 261.24    |                       |              |                  |
| Temp. rating   | °C min -33 max +90   |               |                   | °F min -27.4 max +194 |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)<br>MIL-STD 810F |               |                   |                       |              |                  |
| Versions       | <b>B</b>   | <b>O</b>      | <b>G</b>          | <b>BE</b>             | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam | mil. green w/foam | black empty           | orange empty | mil. green empty |


- Side handles
- Wheels and retractable handle
- Stainless steel reinforced padlockable points
- Two men lift side handles
- Can accommodate 4xBAG-O, 2xBAG-P, 2xBAG-O+1xBAG-P, 2xDIV7641, 2xBAG-O+1xDIV7641 e PANEXPL76
- Can accommodate up to 8 GBAG 76

| 7641                  | 4x BAG-O            |
|-----------------------|---------------------|
| PANEXPL76             |                     |
| 2x DIV7641            | 2x BAG-P            |
|                       |                     |
| 2x BAG-O + 1x DIV7641 | 2x BAG-O + 1x BAG-P |
|                       |                     |



| 7726           |  | L               | W                 | D                     |              |                  |
|----------------|--|-----------------|-------------------|-----------------------|--------------|------------------|
|                |  | LENGTH          | WIDTH             | DEPTH                 | LID          | BASE             |
| Internal dim.  | mm   | 770             | 580               | 265                   | 90           | 175              |
|                | in   | 30 5/16         | 22 13/16          | 10 7/16               | 3 9/16       | 6 7/8            |
| External dim.  | mm   | 836             | 641               | 304                   |              |                  |
|                | in   | 32 15/16        | 25 1/4            | 11 15/16              |              |                  |
| Weight empty   | kg   | 10,30           |                   | lbs 22.70             |              |                  |
| Weight w/foam  | kg   | 12,60           |                   | lbs 27.77             |              |                  |
| Volume         | lit  | 118             |                   | gal 31.17             |              |                  |
| Buoyancy       | kg/max   | 70              |                   | lbs/max 154.32        |              |                  |
| Temp. rating   | °C   | min -33 max +90 |                   | °F min -27.4 max +194 |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                 |                   |                       |              |                  |
| Versions       | <b>B</b>   | <b>O</b>        | <b>G</b>          | <b>BE</b>             | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam   | mil. green w/foam | black empty           | orange empty | mil. green empty |

- Large front handle
- Side handles
- Self-oiling free running wheels
- Can accommodate 2xDIV77 and PANEXPL77

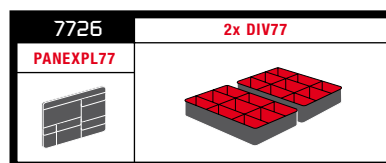

### COMMON FEATURES



Shipping label holder



Automatic purge valve




Stainless steel reinforced padlockable points



| 7745           |  | L               | W                 | D                     |              |                  |
|----------------|--|-----------------|-------------------|-----------------------|--------------|------------------|
|                |  | LENGTH          | WIDTH             | DEPTH                 | LID          | BASE             |
| Internal dim.  | mm   | 770             | 580               | 450                   | 90           | 360              |
|                | in   | 30 5/16         | 22 13/16          | 17 11/16              | 3 9/16       | 14 3/16          |
| External dim.  | mm   | 836             | 641               | 489                   |              |                  |
|                | in   | 32 15/16        | 25 1/4            | 14 3/16               |              |                  |
| Weight empty   | kg   | 15,50           |                   | lbs 34.17             |              |                  |
| Weight w/foam  | kg   | 19,80           |                   | lbs 43.65             |              |                  |
| Volume         | lit  | 200             |                   | gal 52.83             |              |                  |
| Buoyancy       | kg/max   | 144             |                   | lbs/max 317.47        |              |                  |
| Temp. rating   | °C   | min -33 max +90 |                   | °F min -27.4 max +194 |              |                  |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                 |                   |                       |              |                  |
| Versions       | <b>B</b>   | <b>O</b>        | <b>G</b>          | <b>BE</b>             | <b>OE</b>    | <b>GE</b>        |
|                | black w/foam   | orange w/foam   | mil. green w/foam | black empty           | orange empty | mil. green empty |

- Large front handle
- Retractable handle
- Side handles
- Can accommodate 4xDIV77, 2xDIV7745, 1xDIV7745+2xDIV77 and PANEXPL77

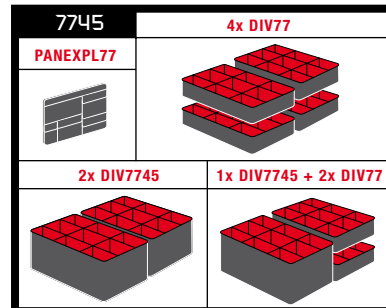



100% ABSOLUTE  
 GUARANTEED  
 FOREVER  
 PROTECTION



COMING  
 SOON



| 7814           |    | L  | W                 | D                     |             |                  |                 |
|----------------|----|--|-------------------|-----------------------|-------------|------------------|-----------------|
|                |    | LENGTH   | WIDTH             | DEPTH                 | LID         | BASE             |                 |
| Internal dim.  | mm | 780  | 350               | 145                   | 42          | 103              |                 |
|                | in | 30 11/16   | 13 3/4            | 5 11/16               | 1 5/8       | 4 1/16           |                 |
| External dim.  | mm | 846  | 427               | 167                   |             |                  |                 |
|                | in | 33 5/16  | 16 13/16          | 6 9/16                |             |                  |                 |
| Weight empty   |    | kg 5,50  |                   | lbs 12.12             |             |                  |                 |
| Weight w/foam  |    | kg 6,40  |                   | lbs 14.11             |             |                  |                 |
| Volume         |    | lt 39,6  |                   | gal 10.46             |             |                  |                 |
| Buoyancy       |    | kg/max 25,3  |                   | lbs/max 55.77         |             |                  |                 |
| Temp. rating   |    | °C min -33 max +90                                   |                   | °F min -27.4 max +194 |             |                  |                 |
| Certifications |    | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                   |                       |             |                  |                 |
| Versions       |    | <b>B</b>   | <b>G</b>          | <b>D</b>              | <b>BE</b>   | <b>GE</b>        | <b>DE</b>       |
|                |    | black w/foam   | mil. green w/foam | des. sand w/foam      | black empty | mil. green empty | des. sand empty |

- Side handle and front rubber grip handle
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)



One side handle



New pull release latch grants additional safety, drop test proof



| 9413           |  | L                 | W                     | D           |                  |                 |
|----------------|--|-------------------|-----------------------|-------------|------------------|-----------------|
|                |  | LENGTH            | WIDTH                 | DEPTH       | LID              | BASE            |
| Internal dim.  | mm   | 939               | 352                   | 137         | 43               | 94              |
|                | in   | 36 15/16          | 13 7/8                | 5 3/8       | 1 11/16          | 3 11/16         |
| External dim.  | mm   | 989               | 415                   | 157         |                  |                 |
|                | in   | 38 15/16          | 16 5/16               | 6 3/16      |                  |                 |
| Weight empty   | kg 6,70  |                   | lbs 14.77             |             |                  |                 |
| Weight w/foam  | kg 7,70  |                   | lbs 16.97             |             |                  |                 |
| Volume         | lt 45,3  |                   | gal 11.96             |             |                  |                 |
| Buoyancy       | kg/max 27,9  |                   | lbs/max 61.50         |             |                  |                 |
| Temp. rating   | °C min -33 max +90                                   |                   | °F min -27.4 max +194 |             |                  |                 |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                   |                       |             |                  |                 |
| Versions       | <b>B</b>   | <b>G</b>          | <b>D</b>              | <b>BE</b>   | <b>GE</b>        | <b>DE</b>       |
|                | black w/foam   | mil. green w/foam | des. sand w/foam      | black empty | mil. green empty | des. sand empty |

- Two men lift side handles and large front handle
- Wheels with bearings
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate GBAG 94 or 2 HBAG 94



3-digits locks on demand (case code + DL)



| 11413          |  | L                 | W                     | D           |                  |                 |
|----------------|--|-------------------|-----------------------|-------------|------------------|-----------------|
|                |  | LENGTH            | WIDTH                 | DEPTH       | LID              | BASE            |
| Internal dim.  | mm   | 1136              | 350                   | 135         | 42               | 93              |
|                | in   | 44 3/4            | 13 3/4                | 5 5/16      | 1 5/8            | 3 11/16         |
| External dim.  | mm   | 1189              | 415                   | 159         |                  |                 |
|                | in   | 46 13/16          | 16 5/16               | 6 1/4       |                  |                 |
| Weight empty   | kg 7,80  |                   | lbs 17.19             |             |                  |                 |
| Weight w/foam  | kg 8,80  |                   | lbs 19.40             |             |                  |                 |
| Volume         | lt 53,7  |                   | gal 14.18             |             |                  |                 |
| Buoyancy       | kg/max 33,3  |                   | lbs/max 73.41         |             |                  |                 |
| Temp. rating   | °C min -33 max +90                                   |                   | °F min -27.4 max +194 |             |                  |                 |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                   |                       |             |                  |                 |
| Versions       | <b>B</b>   | <b>G</b>          | <b>D</b>              | <b>BE</b>   | <b>GE</b>        | <b>DE</b>       |
|                | black w/foam   | mil. green w/foam | des. sand w/foam      | black empty | mil. green empty | des. sand empty |

- Two men lift side handles and large front handle
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate GBAG 114 or 2 HBAG 114



3-digits locks on demand (case code + DL)





| <b>13513</b>   |  | L                 | W                     | D           |                  |                 |
|----------------|--|-------------------|-----------------------|-------------|------------------|-----------------|
|                |  | LENGTH            | WIDTH                 | DEPTH       | LID              | BASE            |
| Internal dim.  | mm   | 1350              | 350                   | 135         | 42               | 93              |
|                | in   | 53 1/8            | 13 3/4                | 5 5/16      | 1 5/8            | 3 11/16         |
| External dim.  | mm   | 1430              | 415                   | 159         |                  |                 |
|                | in   | 56 5/16           | 16 5/16               | 6 1/4       |                  |                 |
| Weight empty   | kg 8,70  |                   | lbs 19.18             |             |                  |                 |
| Weight w/foam  | kg 9,95  |                   | lbs 21.93             |             |                  |                 |
| Volume         | lt 63,7  |                   | gal 16.82             |             |                  |                 |
| Buoyancy       | kg/max 39,5  |                   | lbs/max 87.08         |             |                  |                 |
| Temp. rating   | °C min -33 max +90                                   |                   | °F min -27.4 max +194 |             |                  |                 |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                   |                       |             |                  |                 |
| Versions       | <b>B</b>   | <b>G</b>          | <b>D</b>              | <b>BE</b>   | <b>GE</b>        | <b>DE</b>       |
|                | black w/foam   | mil. green w/foam | des. sand w/foam      | black empty | mil. green empty | des. sand empty |

3-digits locks on demand (case code + DL)



- Two men lift side handles and large front handle
- Wheels with bearings
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate GBAG 135 o 2 HBAG 135



| <b>13527</b>   |  | L                 | W                     | D           |                  |                 |
|----------------|--|-------------------|-----------------------|-------------|------------------|-----------------|
|                |  | LENGTH            | WIDTH                 | DEPTH       | LID              | BASE            |
| Internal dim.  | mm   | 1350              | 350                   | 272         | 42               | 230             |
|                | in   | 53 1/8            | 13 3/4                | 10 11/16    | 1 5/8            | 9 1/16          |
| External dim.  | mm   | 1430              | 415                   | 296         |                  |                 |
|                | in   | 56 5/16           | 16 5/16               | 11 5/8      |                  |                 |
| Weight empty   | kg 11,70   |                   | lbs 25.79             |             |                  |                 |
| Weight w/foam  | kg 14,90   |                   | lbs 32.84             |             |                  |                 |
| Volume         | lt 128,5   |                   | gal 33.94             |             |                  |                 |
| Buoyancy       | kg/max 97,5  |                   | lbs/max 214.95        |             |                  |                 |
| Temp. rating   | °C min -33 max +90                                   |                   | °F min -27.4 max +194 |             |                  |                 |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                   |                       |             |                  |                 |
| Versions       | <b>B</b>   | <b>G</b>          | <b>D</b>              | <b>BE</b>   | <b>GE</b>        | <b>DE</b>       |
|                | black w/foam   | mil. green w/foam | des. sand w/foam      | black empty | mil. green empty | des. sand empty |



Two men lift side handles



6 wheels with bearings



3-digits locks on demand (case code + DL)

- Two men lift side handles and large front handle
- Wheels with bearings
- Can accommodate 2 GBAG 135



# THE LONGEST WATERPROOF CASE ON THE MARKET




Self-oiling free running wheels



Two men lift side handles



Double automatic purge valves



New wide pull release latch grants additional safety drop test proof

| 15416          |  | L                 | W                | D                     |                  |                 |
|----------------|--|-------------------|------------------|-----------------------|------------------|-----------------|
|                |  | LENGTH            | WIDTH            | DEPTH                 | LID              | BASE            |
| Internal dim.  | mm   | 1540              | 377              | 160                   | 42               | 118             |
|                | in   | 60 5/8            | 14 13/16         | 6 5/16                | 1 5/8            | 4 5/8           |
| External dim.  | mm   | 1629              | 456              | 183                   |                  |                 |
|                | in   | 64 1/8            | 17 15/16         | 7 3/16                |                  |                 |
| Weight empty   |  | kg 11,30          |                  | lbs 24.91             |                  |                 |
| Weight w/foam  |  | kg 13,40          |                  | lbs 29.54             |                  |                 |
| Volume         |  | lt 92,9           |                  | gal 24.54             |                  |                 |
| Buoyancy       |  | kg/max 61,6       |                  | lbs/max 135.80        |                  |                 |
| Temp. rating   | °C   | min -33 max +90   |                  | °F min -27.4 max +194 |                  |                 |
| Certifications | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                   |                  |                       |                  |                 |
| Versions       | <b>B</b>   | <b>G</b>          | <b>D</b>         | <b>BE</b>             | <b>GE</b>        | <b>DE</b>       |
|                | black w/foam   | mil. green w/foam | des. sand w/foam | black empty           | mil. green empty | des. sand empty |

- Side handles and large front handle
- Self-oiling free running wheels
- Stainless steel reinforced padlockable points
- Double automatic purge valves



Two men lift side handles



Optional 3-digits locks (case code + DL)

## VERSIONS

### 10826.B

black - with plastic latches, hinged lid and metal support stays, internal precubed foam layers, convoluted foam in the lid.

### 10826.BE

black - with plastic latches, hinged lid and metal support stays, empty.



Stainless steel reinforced padlockable points and metal latches



4 self-oiling free running wheels



| 10826                       |  | L               | W       | D                     |       |       |
|-----------------------------|--|-----------------|---------|-----------------------|-------|-------|
|                             |  | LENGTH          | WIDTH   | DEPTH                 | LID   | BASE  |
| Internal dim.               | mm   | 1080            | 620     | 260                   | 60    | 200   |
|                             | in   | 42 1/2          | 24 7/16 | 10 1/4                | 2 3/8 | 7 7/8 |
| External dim.               | mm   | 1178            | 725     | 287                   |       |       |
|                             | in   | 46 3/8          | 28 1/4  | 11 5/16               |       |       |
| Weight empty                | kg   | 17              |         | lbs 37.47             |       |       |
| Weight w/foam               | kg   | 20,40           |         | lbs 44.97             |       |       |
| Weight w/multi weapons foam | kg   | 19,60           |         | lbs 43.21             |       |       |
| Volume                      | lt   | 174             |         | gal 45.96             |       |       |
| Buoyancy                    | kg/max   | 120,6           |         | lbs/max 265.87        |       |       |
| Temp. rating                | °C   | min -33 max +90 |         | °F min -27.4 max +194 |       |       |
| Certifications              | IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) |                 |         |                       |       |       |

- Mod. 10826.BE can accommodate up to 4 GBAG 108



100%  
G



12 HEAVY DUTY METAL LATCHES grant a more reliable retaining during rough handling.



4 self-oiling free running wheels



4 Stainless steel reinforced padlockable points



### VERSIONS

- 10840.B**  
black - with foam
- 10840.G**  
mil. green - with foam
- 10840.BE**  
black - empty
- 10840.GE**  
mil. green - empty



Art. PANDIV.10840  
Optional.  
To hold the lid foam content steady in place.  
The kit includes:  
- 1 alveolar polypropylene sheet  
- 4 velcro straps  
- 8 metal loops and fixing hardware

|                             |    | 10840              |         | L        | W     | D                     |  |  |
|-----------------------------|----|--------------------|---------|----------|-------|-----------------------|--|--|
|                             |    | LENGTH             | WIDTH   | DEPTH    | LID   | BASE                  |  |  |
| Internal dim.               | mm | 1080               | 620     | 400      | 200   | 200                   |  |  |
|                             | in | 42 1/2             | 24 7/16 | 15 3/4   | 7 7/8 | 7 7/8                 |  |  |
| External dim.               | mm | 1178               | 718     | 427      |       |                       |  |  |
|                             | in | 46 3/8             | 28 1/4  | 16 13/16 |       |                       |  |  |
| Weight empty                |    | kg 19,80           |         |          |       | lbs 43.65             |  |  |
| Weight w/foam               |    | kg 26,30           |         |          |       | lbs 57.32             |  |  |
| Weight w/multi weapons foam |    | kg 25,00           |         |          |       | lbs 55.11             |  |  |
| Volume                      |    | lt 260             |         |          |       | gal 68.68             |  |  |
| Buoyancy                    |    | kg/max 120,6       |         |          |       | lbs/max 265.87        |  |  |
| Temp. rating                |    | °C min -33 max +90 |         |          |       | °F min -27.4 max +194 |  |  |

- Can accommodate up to 6 GBAG 108
- Detachable lid for easier access
- Folding side handles on both shells
- Two men lift large folding side handles



## A CASE YOU CAN WEAR

The Explorer Cases backpacks, are the most innovative backpack carrying system for waterproof case available in the market: a simple concept, lightweight and cost effective solution to quickly turn a case into a backpack. This clever and user-friendly carrying system allows the owner to protect sensitive instruments and equipment stored in an explorer case and, at the same time, to get all the convenience of a free hands backpack solution. Available in two different sizes.

**BACKPACK M** FITS MODELS 3317, 3818 AND 5117 - **BACKPACK L** FITS MODELS 3317W, 4412, 4419 AND 4820



# PHOTO DIVIDERS

Modular dividers to protect and transport sensitive equipment.



DIV1908 (fits mod. 1908)  
Ext. Dim. 185x120x65 mm.  
7 5/16 x 4 3/4 x 2 9/16 in.



DIV1913 (fits mod. 1913)  
Ext. Dim. 185x120x115 mm.  
7 5/16 x 4 3/4 x 4 1/2 in.



DIV2209 (fits mod. 2209)  
Ext. Dim. 215x155x75 mm.  
8 7/16 x 6 1/8 x 2 15/16 in.



DIV2214 (fits mod. 2214)  
Ext. Dim. 215x155x125 mm.  
8 7/16 x 6 1/8 x 4 15/16 in.



DIV2712 (fits mod. 2712)  
Ext. Dim. 270x195x80 mm.  
10 5/8 x 7 11/16 x 3 1/8 in.



DIV2717 (fits mod. 2717)  
Ext. Dim. 270x195x125 mm.  
10 5/8 x 7 11/16 x 4 15/16 in.



DIV3317 (fits mod. 3317)  
Ext. Dim. 325x230x100 mm.  
12 13/16 x 9 1/16 x 3 15/16 in.



DIV3317W (fits mod. 3317W)  
Ext. Dim. 325x340x100 mm.  
12 13/16 x 13 3/8 x 3 15/16 in.



DIV3818 (fits mod. 3818)  
Ext. Dim. 375x265x130 mm.  
14 3/4 x 10 7/16 x 5 1/8 in.



DIV4412 (fits mod. 4412)  
Ext. Dim. 440x330x80 mm.  
17 5/16 x 13 x 3 1/8 in.



DIV4419 (fits mod. 4419)  
Ext. Dim. 440x330x135 mm.  
17 5/16 x 13 x 5 5/16 in.



DIV4820 (fits mod. 4820)  
Ext. Dim. 475x365x145 mm.  
18 11/16 x 14 3/8 x 5 11/16 in.



DIV51 (fits mod. 5117-5122)  
Ext. Dim. 510x265x120 mm.  
20 1/16 x 10 7/16 x 4 3/4 in.



DIV52 (fits mod. 5218-5221)  
Ext. Dim. 515x275x120 mm.  
20 1/4 x 10 13/16 x 4 3/4 in.



DIV53 (fits mod. 5325-5326)  
Ext. Dim. 520x395x100 mm.  
20 1/2 x 15 9/16 x 3 15/16 in.



DIV58 (fits mod. 5822-5823-5833)  
Ext. Dim. 430x275x155 mm.  
16 15/16 x 10 13/16 x 6 1/8 in.



DIV58.1 (fits mod. 5833)  
Ext. Dim. 430x275x265 mm.  
16 15/16 x 10 13/16 x 10 7/16 in.



DIV58.2 (fits mod. 5833)  
Ext. Dim. 430x275x110 mm.  
16 15/16 x 10 13/16 x 0 7/16 in.



DIV7630 (fits mod. 7630)  
Ext. Dim. 470x375x240 mm.  
18 1/2 x 14 3/4 x 9 7/16 in.



DIV7641 (fits mod. 7641)  
Ext. Dim. 470x375x345 mm.  
18 1/2 x 14 3/4 x 13 9/16 in.



DIV77 (fits mod. 7726)  
Ext. Dim. 570x375x175 mm.  
22 7/16 x 14 3/4 x 6 7/8 in.



DIV7745 (fits mod. 7745)  
Ext. Dim. 580x370x345 mm.  
22 13/16 x 14 9/16 x 13 9/16 in.

# COVERS FOR PHOTO DIVIDERS

Top covers are available for larger models (on demand).



COV44 (fits mod. 4412-4419)  
COV48-76 (fits mod. 4820-7630-7641)  
COV51 (fits mod. 5117-5122)  
COV53 (fits mod. 5325-5326)  
COV58 (fits mod. 5822-5823-5833)  
COV77 (fits mod. 7726-7745)







# DRONE DIVIDER

DIVIDER FOR LARGER DRONES - Internal adjustable partitions.

DRN77 (fits mod. 7745)  
Ext. Dim. 740x570x350 mm.  
29 1/8 x 22 7/16 x 13 3/4 in.

# PHOTO AND DRONE BACKPACKS



DRN44 (fits mod. 4419)  
Ext. Dim. 340x180x440 mm.  
13 3/8 x 7 1/16 x 17 5/16 in.



DRN53 (fits mod. 5326)  
Ext. Dim. 430x250x540 mm.  
16 15/16 x 9 13/16 x 21 1/4 in.



<< DRONE  
BACKPACKS  
Internal removable  
pouches for  
accessories



BPH44 (fits mod. 4419)  
Ext. Dim. 340x180x440 mm.  
13 3/8 x 7 1/16 x 17 5/16 in.



BPH53 (fits mod. 5326)  
Ext. Dim. 430x250x540 mm.  
16 15/16 x 9 13/16 x 21 1/4 in.



<< PHOTO  
BACKPACKS  
Internal  
adjustable  
dividers



# BACKPACK CABIN

This practical kit adds backpack transportability to the models 5218 and 5221.

- Generously and ergonomically padded for maximum comfort
- Detachable lap belt
- Quickly attachable and removable





100% ABSOLUTE  
 GUARANTEED  
 FOREVER  
 PROTECTION

## LID PANELS



PANEXPL27 (fits mod. 2712-17)  
 Dim. 255x180 mm.  
 10 1/16 x 7 1/16 in.



PANEXPL33 (fits mod. 3317)  
 Dim. 310x215 mm.  
 12 3/16 x 8 7/16 in.



PANEXPL33W (fits mod. 3317W)  
 Dim. 310x320 mm.  
 12 3/16 x 12 5/8 in.



PANEXPL38 (fits mod. 3818)  
 Dim. 375x225 mm.  
 14 3/4 x 8 7/8 in.



PANEXPL44 (fits mod. 4412-19)  
 Dim. 422x295 mm.  
 16 5/8 x 11 5/8 in.



PANEXPL48 (fits mod. 4820)  
 Dim. 475x325 mm.  
 18 11/16 x 12 13/16 in.



PANEXPL51 (fits mod. 5117-22)  
 Dim. 500x230 mm.  
 19 7/8 x 9 1/16 in.



PANEXPL52 (fits mod. 5218-21)  
 Dim. 505x270 mm.  
 19 7/8 x 10 5/8 in.



PANEXPL53 (fits mod. 5325-5326)  
 Dim. 525x390 mm.  
 20 11/16 x 15 3/8 in.



PANEXPL58 (fits mod. 5822-23-33)  
 Dim. 575x395 mm.  
 22 5/8 x 15 9/16 in.



PANEXPL76 (fits mod. 7630-7641)  
 Dim. 755x440 mm.  
 29 3/4 x 17 5/16 in.



PANEXPL77 (fits mod. 7726-7745)  
 Dim. 720x530 mm.  
 28 3/8 x 20 7/8 in.



# PADDED BAGS



**BAG-R** (fits mod. 2712)  
Ext. Dim. 270x195x80 mm.  
10 5/8 x 7 11/16 x 3 1/8 in.

**BAG-S** (fits mod. 2717)  
Ext. Dim. 270x195x130 mm.  
10 5/8 x 7 11/16 x 5 1/8 in.

**BAG-T** (fits mod. 3317)  
Ext. Dim. 325x230x95 mm.  
12 13/16 x 9 1/16 x 3 3/4 in.

**BAG-U** (fits mod. 3317W)  
Ext. Dim. 325x340x95 mm.  
12 13/16 x 13 3/8 x 3 3/4 in.



**BAG-E** (fits mod. 3818)  
Ext. Dim. 375x265x140 mm.  
14 3/4 x 10 7/16 x 5 1/2 in.



**BAG-PC44** (fits mod. 4412)  
Ext. Dim. 450x345x55 mm.  
17 11/16 x 13 9/16 x 2 3/16 in.



**BAG-A** (fits mod. 4419)  
Ext. Dim. 450x350x125 mm.  
17 11/16 x 13 3/4 x 4 15/16 in.



**BAG-F** (fits mod. 4820)  
Ext. Dim. 475x365x160 mm.  
18 11/16 x 14 3/8 x 6 5/16 in.



**BAG-PC48** (fits mod. 4820)  
Ext. Dim. 475x365x170 mm.  
18 11/16 x 14 3/8 x 6 11/16 in.



**BAG-B** (fits mod. 5117-5122)  
Ext. Dim. 530x285x135 mm.  
20 7/8 x 11 1/4 x 5 5/16 in.



**BAG-V** (fits mod. 5325-5326)  
Ext. Dim. 535x410x100 mm.  
21 1/16 x 16 1/8 x 3 15/16 in.



**BAG-G** (fits mod. 5822-5823-5833)  
Ext. Dim. 435x285x165 mm.  
17 1/8 x 11 1/4 x 6 1/2 in.



**BAG-L** (fits mod. 7630)  
Ext. Dim. 380x240x240 mm.  
14 15/16 x 9 7/16 x 9 7/16 in.



**BAG-M** (fits mod. 7630)  
Ext. Dim. 755x240x245 mm.  
29 3/4 x 9 7/16 x 9 5/8 in.



**BAG-O** (fits mod. 7641)  
Ext. Dim. 382x242x355 mm.  
15 1/16 x 9 1/2 x 14 in.



**BAG-P** (fits mod. 7641)  
Ext. Dim. 755x240x350 mm.  
29 3/4 x 9 7/16 x 13 3/4 in.

# PRECUBED FOAM

Standard models are available empty or with layers of precubed foam in the bottom and convoluted foam in the lid (custom foams available on demand).



SET OF CONVOLUTED FOAM  
ONLY FOR THE LID - includes 2  
pcs. (Art. LIDFOAM. + item nr.)



SET OF LAYERS OF PRECUBED  
FOAM FOR THE BOTTOM AND  
CONVOLUTED FOAM FOR THE  
LID (Art. FOAM. + item nr.)





## TRIPOD BAG

Padded tripod bag in tear resistant fabric. Adjustable shoulder strap and frontal pouch for accessories. Ideal to protect and transport professional tripods for cameras and video cameras.



### TRIPOD BAG90

Ext. Dim. 900x170max/140minx100 mm.  
35 7/16 x 6 11/16max/ x 5 1/2 x 3 5/16 in.



## NOTEBOOK SLEEVE

Protective padded notebook sleeve. Protects the laptop from shocks and scratches.

Realized in two dimensions, for PC 13"-13.3" and PC 15"-15.6"



### TOP ENVELOPE 13

Protective sleeve for PC 13"-13.3"



### TOP ENVELOPE 15

Protective sleeve for PC 15"-15.6"




# MOUNTING BRACKETS


Our flexible manufacturing process allows us to easily and efficiently make your OEM case developing specific interiors to meet your requirements.




Art. KIT SUPP.PLAST (6 pcs.)



Art. KIT SUPP.EXPL (6 pcs.)

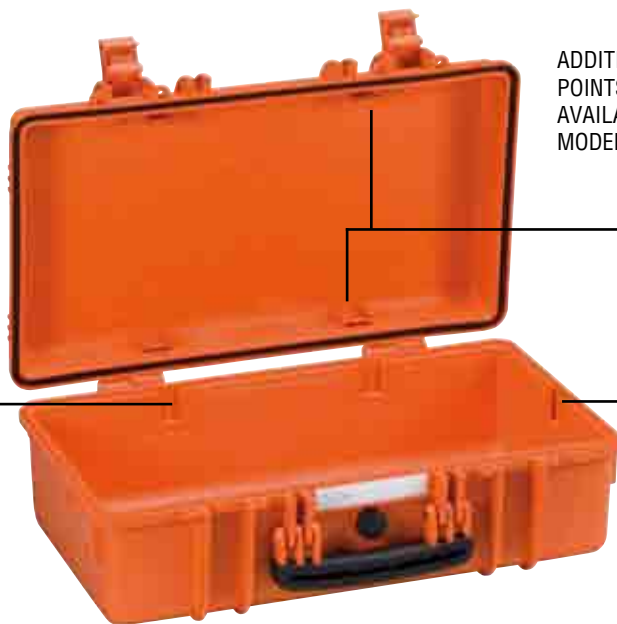

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS



Art. KIT.EXPL.PLUGS (6 pcs.)

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER. AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY. THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY.

THE SLOTS CAN BE CLOSED BY BLIND INSERTS THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

# PANEL FRAMES

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES.

EQUIPPED WITH AN ADDITIONAL GASKET, THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.



Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING44, PANRING44.USA, PANRING48, PANRING48.USA, PANRING51, PANRING51.USA.

# PADLOCKS

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASES MOULD SO AS NOT TO SWING OUT.



PATENTED HEAVY DUTY BRASS PADLOCK  
(Art. EXPL PADLOCK)



PATENTED COMBINATION PADLOCK  
(Art. EXPL COMBILOCK)



TSA LOCK™ COMBI PADLOCK  
(Art. EXPL TSA.DIGILOCK)



TSA LOCK™ PADLOCKS ALLOW AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.



# OEM SOLUTIONS

Our aim is always to grant maximum protection to the content, optimizing inner spaces and never ignoring handiness. Along with the standard production, should you have specific enquiries for cut foams, different case colors, labeling and other customizations, do not hesitate to get in touch with us for technical feedback.





- Empty
- Trolley case integral wheels and hinge out pull handle (only MUB78)

- Moulded High Impact Polypropylene
- Moulded integral lifting points on both ends
- Full length steel hinge pin to lid
- Positive grab over latching catches
- Lightweight
- Use in high/low temp environments
- Slide out clear ID Nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points

| MUB78         |             | L                | W               | D              |         |      |
|---------------|-------------|------------------|-----------------|----------------|---------|------|
|               |             | LENGTH           | WIDTH           | DEPTH          | LID     | BASE |
| Internal dim. | mm          | 780              | 410             | 330            | 50      | 280  |
|               | in          | 30 11/16         | 16 1/8          | 13             | 1 15/16 | 11   |
| External dim. | mm          | 807              | 470             | 345            |         |      |
|               | in          | 31 3/4           | 18 1/2          | 13 9/16        |         |      |
| Weight empty  | kg 6,30     |                  |                 | lbs 13.88      |         |      |
| Volume        | lt 89       |                  |                 | gal 23.51      |         |      |
| Buoyancy      | kg/max 80,5 |                  |                 | lbs/max 177.47 |         |      |
| Versions      | MUB78       | MUB78.G E        | MUB78.D E       |                |         |      |
|               | black empty | mil. green empty | des. sand empty |                |         |      |

Art. KIT TRAY MUB - Optional - Tray with removable divider for tools, instruments or spare parts. MUB78 can fit up to two trays. Elasticated bands for the tray also available (KIT03).



- Empty

| MUB65         |             | L                | W               | D             |        |       |
|---------------|-------------|------------------|-----------------|---------------|--------|-------|
|               |             | LENGTH           | WIDTH           | DEPTH         | LID    | BASE  |
| Internal dim. | mm          | 653              | 340             | 312           | 65     | 247   |
|               | in          | 25 11/16         | 13 3/8          | 12 5/16       | 2 9/16 | 9 3/4 |
| External dim. | mm          | 678              | 404             | 331           |        |       |
|               | in          | 26 11/16         | 15 7/8          | 13 1/16       |        |       |
| Weight empty  | kg 4,40     |                  |                 | lbs 9.70      |        |       |
| Volume        | lt 61,5     |                  |                 | gal 16.24     |        |       |
| Buoyancy      | kg/max 42,7 |                  |                 | lbs/max 94.13 |        |       |
| Versions      | MUB65       | MUB65.G E        | MUB65.D E       |               |        |       |
|               | black empty | mil. green empty | des. sand empty |               |        |       |



| GUNCASE       |                            | L        | W           | D         |   |       |
|---------------|----------------------------|----------|-------------|-----------|---|-------|
|               |                            | LENGTH   | WIDTH       | DEPTH     | LID   | BASE  |
| Internal dim. | mm                         | 420      | 925         | 120       | 60  | 60    |
|               | in                         | 16 9/16  | 36 7/16     | 4 3/4     | 2 3/8   | 2 3/8 |
| External dim. | mm                         | 475      | 1078        | 157       |   |       |
|               | in                         | 18 11/16 | 42 7/16     | 6 3/16    |   |       |
| Weight empty  | kg 7,1                     |          |             | lbs 15.65 |   |       |
| Weight w/foam | kg 8,1                     |          |             | lbs 17.85 |   |       |
| Volume        | lt 46,6                    |          |             | gal 12.31 |   |       |
| Versions      | GUNCASE.B                  |          | GUNCASE.BE  |           | GUNCASE.B CV                                  |       |
|               | black with convoluted foam |          | black empty |           | black w/convoluted foam in the bottom and lid |       |

- 4 easy action quick release "up&over" catches (2 with combi locks)
- Manual pressure release valve



Free running wheels




Strong metal handle

# TECHNICAL SPECIFICATIONS

| CODES | COLORS   |        |          |         | INTERNAL CONFIG.      | REMOV. LID | WHEELS | WEIGHT KG | BUOYANCY KG MAX | VOLUME LITRES | INTERNAL DIM. (mm) |     |     | EXTERNAL DIM. (mm) |      |      |     |     |
|-------|----------|--------|----------|---------|-----------------------|------------|--------|-----------|-----------------|---------------|--------------------|-----|-----|--------------------|------|------|-----|-----|
|       | BLACK    | ORANGE | M. GREEN | D. SAND |                       |            |        |           |                 |               | L                  | W   | D   | LID                | BASE | L    | W   | D   |
| 1908  | BE       | OE     | GE       |         | EMPTY                 |            |        | 0,7       | 1,4             | 2             | 190                | 125 | 85  | 20                 | 65   | 216  | 180 | 102 |
|       | B        | O      | G        |         | W/FOAM                |            |        | 0,8       |                 |               |                    |     |     |                    |      |      |     |     |
| 1913  | BE       | OE     | GE       |         | EMPTY                 |            |        | 0,85      | 2,4             | 3,2           | 190                | 125 | 135 | 20                 | 115  | 216  | 180 | 152 |
|       | B        | O      | G        |         | W/FOAM                |            |        | 0,92      |                 |               |                    |     |     |                    |      |      |     |     |
| 2209  | BE       | OE     | GE       |         | EMPTY                 |            |        | 0,88      | 2,3             | 3,3           | 220                | 160 | 95  | 20                 | 75   | 246  | 215 | 112 |
|       | B        | O      | G        |         | W/FOAM                |            |        | 0,99      |                 |               |                    |     |     |                    |      |      |     |     |
| 2214  | BE       | OE     | GE       |         | EMPTY                 |            |        | 1,16      | 3,9             | 5,1           | 220                | 160 | 145 | 20                 | 125  | 246  | 215 | 162 |
|       | B        | O      | G        |         | W/FOAM                |            |        | 1,29      |                 |               |                    |     |     |                    |      |      |     |     |
| 2712  | BE       | OE     | GE       |         | EMPTY                 |            |        | 1,62      | 4,2             | 6,6           | 276                | 200 | 120 | 35                 | 85   | 305  | 270 | 144 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 1,83      |                 |               |                    |     |     |                    |      |      |     |     |
| 2717  | BE       | OE     | GE       |         | EMPTY                 |            |        | 1,93      | 6,7             | 9,3           | 276                | 200 | 170 | 35                 | 135  | 305  | 270 | 194 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 2,12      |                 |               |                    |     |     |                    |      |      |     |     |
| 3005  | BE       | OE     | GE       | DE      | EMPTY                 |            |        | 1,1       | 2,1             | 4             | 300                | 210 | 58  | 20                 | 38   | 326  | 269 | 75  |
|       | B        | O      | G        | D       | W/FOAM                |            |        | 1,2       |                 |               |                    |     |     |                    |      |      |     |     |
| 3317  | BE       | OE     | GE       |         | EMPTY                 |            |        | 2,29      | 7               | 13,1          | 330                | 234 | 170 | 68                 | 102  | 360  | 304 | 194 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 2,51      |                 |               |                    |     |     |                    |      |      |     |     |
| 3317W | BE       |        |          |         | EMPTY                 |            |        | 2,92      | 10,6            | 19,6          | 330                | 350 | 170 | 68                 | 102  | 360  | 420 | 194 |
|       | B        |        |          |         | W/FOAM                | YES        |        | 3,3       |                 |               |                    |     |     |                    |      |      |     |     |
| 3818  | BE       | OE     | GE       |         | EMPTY                 |            |        | 3,14      | 12,4            | 18,4          | 380                | 270 | 180 | 47                 | 133  | 410  | 340 | 205 |
|       | B        | O      | G        |         | W/FOAM                |            |        | 3,58      |                 |               |                    |     |     |                    |      |      |     |     |
| 4412  | BE       | OE     | GE       |         | EMPTY                 |            |        | 3,4       | 10,7            | 19,2          | 445                | 345 | 125 | 47                 | 78   | 474  | 415 | 149 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 3,9       |                 |               |                    |     |     |                    |      |      |     |     |
| 4419  | BE       | OE     | GE       |         | EMPTY                 |            |        | 4         | 19,7            | 29,2          | 445                | 345 | 190 | 47                 | 143  | 474  | 415 | 214 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 4,7       |                 |               |                    |     |     |                    |      |      |     |     |
| 4820  | BE       | OE     | GE       |         | EMPTY                 |            |        | 4,64      | 24,7            | 35,5          | 480                | 370 | 205 | 50                 | 155  | 520  | 435 | 230 |
|       | B        | O      | G        |         | W/FOAM                |            |        | 5,4       |                 |               |                    |     |     |                    |      |      |     |     |
| 5117  | BE       | OE     | GE       |         | EMPTY                 |            |        | 3,8       | 15,8            | 24,7          | 517                | 277 | 173 | 50                 | 123  | 546  | 347 | 197 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 4,5       |                 |               |                    |     |     |                    |      |      |     |     |
| 5122  | BE       | OE     | GE       |         | EMPTY                 |            |        | 6         | 21,5            | 31            | 517                | 277 | 217 | 50                 | 167  | 546  | 347 | 247 |
|       | B        | O      | G        |         | W/FOAM                | YES        | YES    | 7         |                 |               |                    |     |     |                    |      |      |     |     |
| 5218  | BE       |        | GE       | DE      | EMPTY                 |            |        | 3,75      | 20              | 26,6          | 520                | 285 | 180 | 30                 | 150  | 550  | 350 | 200 |
|       | B        |        | G        | E       | W/FOAM                | YES        | YES    | 4,3       |                 |               |                    |     |     |                    |      |      |     |     |
| 5221  | BE       |        | GE       | DE      | EMPTY                 |            |        | 3,9       | 20              | 30,3          | 520                | 285 | 205 | 55                 | 150  | 550  | 350 | 225 |
|       | B        |        | G        | D       | W/FOAM                | YES        | YES    | 4,5       |                 |               |                    |     |     |                    |      |      |     |     |
| 5140  | BKT01.AH |        |          |         | W/FOAM FILLED DRAWERS |            |        | 13,8      | YES             | YES           |                    |     |     |                    |      | 581  | 381 | 455 |
|       | BKT02.AH |        |          |         | W/EMPTY DRAWERS       |            |        | 13        |                 |               |                    |     |     |                    |      |      |     |     |
|       | BKTE.AH  |        |          |         | IDRAW - DRAWERS READY |            |        | 9,75      |                 |               |                    |     |     |                    |      |      |     |     |
|       | X.B      |        |          |         | IBOX - BOXES READY    |            |        | 9,75      |                 |               |                    |     |     |                    |      |      |     |     |
|       | BE.AH    |        |          |         | COMPLETELY EMPTY      |            |        | 7,52      |                 |               |                    |     |     |                    |      |      |     |     |
| 5325  | BE       | OE     | GE       |         | EMPTY                 |            |        | 7         | 37,2            | 53            | 538                | 405 | 250 | 60                 | 190  | 607  | 475 | 275 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 8,25      |                 |               |                    |     |     |                    |      |      |     |     |
| 5326  | BE       | OE     | GE       |         | EMPTY                 |            |        | 10        | 37,2            | 53            | 538                | 405 | 250 | 60                 | 190  | 627  | 475 | 292 |
|       | B        | O      | G        |         | W/FOAM                | YES        | YES    | 11,25     |                 |               |                    |     |     |                    |      |      |     |     |
| 5822  | BE       | OE     | GE       |         | EMPTY                 |            |        | 7,16      | 36,7            | 56,1          | 580                | 440 | 220 | 60                 | 160  | 650  | 510 | 245 |
|       | B        | O      | G        |         | W/FOAM                |            |        | 8,39      |                 |               |                    |     |     |                    |      |      |     |     |
| 5823  | BE       | OE     | GE       |         | EMPTY                 |            |        | 9,17      | 36,7            | 56,1          | 580                | 440 | 220 | 60                 | 160  | 670  | 510 | 262 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 10,4      |                 |               |                    |     |     |                    |      |      |     |     |
| 5833  | BE       | OE     | GE       |         | EMPTY                 |            |        | 10,54     | 62              | 84,2          | 580                | 440 | 330 | 60                 | 270  | 670  | 510 | 372 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 12,65     |                 |               |                    |     |     |                    |      |      |     |     |
| 7630  | BE       | OE     | GE       |         | EMPTY                 |            |        | 13,56     | 81,8            | 113,1         | 765                | 485 | 305 | 60                 | 245  | 860  | 560 | 355 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 16,39     |                 |               |                    |     |     |                    |      |      |     |     |
| 7641  | BE       | OE     | GE       |         | EMPTY                 |            |        | 15,02     | 118,5           | 153,9         | 765                | 485 | 415 | 60                 | 355  | 860  | 560 | 460 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 18,87     |                 |               |                    |     |     |                    |      |      |     |     |
| 7726  | BE       | OE     | GE       |         | EMPTY                 |            |        | 10,3      | 70              | 118           | 770                | 580 | 265 | 90                 | 175  | 836  | 641 | 304 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 12,6      |                 |               |                    |     |     |                    |      |      |     |     |
| 7745  | BE       | OE     | GE       |         | EMPTY                 |            |        | 15,5      | 144             | 200           | 770                | 580 | 450 | 90                 | 360  | 836  | 641 | 489 |
|       | B        | O      | G        |         | W/FOAM                | YES        |        | 19,8      |                 |               |                    |     |     |                    |      |      |     |     |
| 7814  | BE       |        | GE       | DE      | EMPTY                 |            |        | 5,5       | 25,3            | 39,6          | 780                | 350 | 145 | 42                 | 103  | 846  | 427 | 167 |
|       | B        |        | G        | D       | W/FOAM                |            |        | 6,4       |                 |               |                    |     |     |                    |      |      |     |     |
| 9413  | BE       |        | GE       | DE      | EMPTY                 |            |        | 6,7       | 27,9            | 45,3          | 939                | 352 | 137 | 43                 | 94   | 989  | 415 | 157 |
|       | B        |        | G        | D       | W/FOAM                | YES        |        | 7,7       |                 |               |                    |     |     |                    |      |      |     |     |
| 11413 | BE       |        | GE       | DE      | EMPTY                 |            |        | 7,8       | 33,3            | 53,7          | 1136               | 350 | 135 | 42                 | 93   | 1189 | 415 | 159 |
|       | B        |        | G        | D       | W/FOAM                | YES        |        | 8,8       |                 |               |                    |     |     |                    |      |      |     |     |
| 13513 | BE       |        | GE       | DE      | EMPTY                 |            |        | 8,7       | 39,5            | 63,7          | 1350               | 350 | 135 | 42                 | 93   | 1430 | 415 | 159 |
|       | B        |        | G        | D       | W/FOAM                | YES        |        | 9,95      |                 |               |                    |     |     |                    |      |      |     |     |
| 13527 | BE       |        | GE       | DE      | EMPTY                 |            |        | 11,7      | 97,5            | 128,5         | 1350               | 350 | 272 | 42                 | 230  | 1430 | 415 | 296 |
|       | B        |        | G        | D       | W/FOAM                | YES        |        | 14,9      |                 |               |                    |     |     |                    |      |      |     |     |
| 15416 | BE       |        | GE       | DE      | EMPTY                 |            |        | 11,3      | 61,6            | 92,9          | 1540               | 377 | 160 | 42                 | 118  | 1629 | 456 | 183 |
|       | B        |        | G        | D       | W/FOAM                | YES        |        | 13,4      |                 |               |                    |     |     |                    |      |      |     |     |
| 10826 | BE       |        |          |         | EMPTY                 |            |        | 17        | 120,6           | 174           | 1080               | 620 | 260 | 60                 | 200  | 1178 | 725 | 287 |
|       | B        |        |          |         | W/FOAM                | YES        |        | 20,4      |                 |               |                    |     |     |                    |      |      |     |     |
| 10840 | BE       |        | GE       |         | EMPTY                 |            |        | 19,8      | 120,6           | 260           | 1080               | 620 | 400 | 200                | 200  | 1178 | 718 | 427 |
|       | B        |        | G        |         | W/FOAM                | YES        | YES    | 26,3      |                 |               |                    |     |     |                    |      |      |     |     |

\* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

\*\* For models 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.

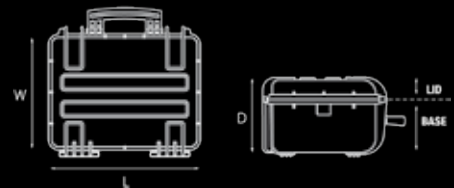

Distributed by:



GT LINE srl  
 Via del Lavoro, 9 - Loc. Crespellano  
 40053 Valsamoggia (Bo) - Italy  
 Tel. +39 051 65041 - Fax +39 051 734925  
 www.explorercases.com - sales@explorercases.com



REG. N. 1594-A  
 UNI EN ISO 9001:2008

Content is not included. The information contained in this catalogue are indicative only. GT Line reserves the right at all times to incorporate modifications in the models described, in accordance with technical or commercial requirements.

CAT. GEN. EXPL. EN REV. 1 - 02/19 - 5.000 EN - MP.0287